


ACETYLENE HOSE DOUBLE BRAID

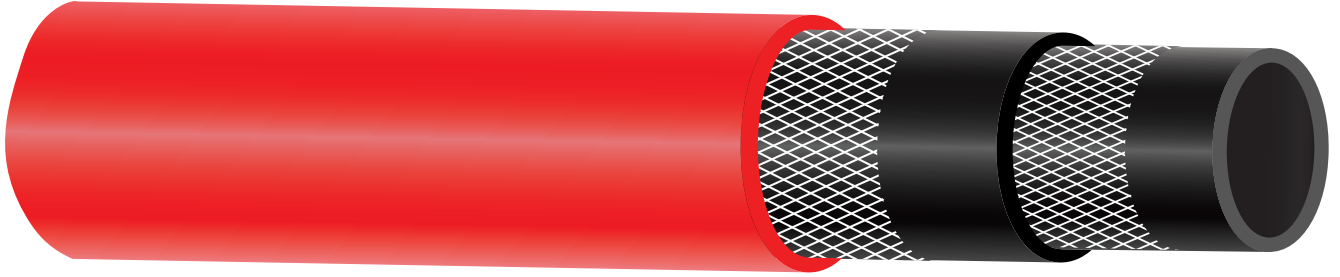

- TUBE** : Natural and Synthetic rubber blend
- REINFORCEMENT** : High Tenacity Synthetic Double Textile braid
- COVER** : Red abrasion & ozone resistant, SBR
- TEMP RANGE** : -25°C + 80°C (-13° F +176° F)
- APPLICATIONS** : Acetylene gas in welding/cutting
- PROPERTIES** : High Abrasion Resistance
Uniform Thickness
flexible
Heat Resistance
- STANDARD COLOUR AND FINISH** : Inner tube - Black
Outer cover - Red
Finish - Smooth/Wrapped
- APPLICABLE STD** : IS 447 , ISO 3821

PART NO.	INNER DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtrs
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHAC148-06	1/4	6	14.5	20	300	80	1200	1.9	48	0.275	50 / 100
EHAC148-08	5/16	8	16.5	20	300	80	1200	2.5	64	0.325	50 / 100
EHAC148-10	3/8	10	18.5	20	300	80	1200	3.9	100	0.375	50 / 100