


CNG HOSE

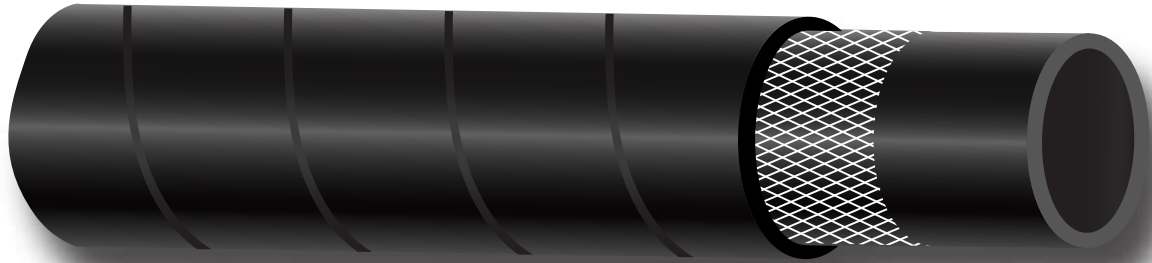

- TUBE** : High moony viscosity, oil resistant synthetic rubber
- REINFORCEMENT** : Single braided high tensile yarn
- COVER** : Synthetic rubber resistant to abrasion and weather
- TEMP RANGE** : -40° C +100° C approx. (-40° F +212° F approx.)
- APPLICATIONS** : For use in motor vehicles with CNG Installations
- PROPERTIES** : Uniform Thickness
Flexible
- STANDARD COLOUR AND FINISH** : Inner Tube - Black
Outer Cover - Black
Finish -Wrapped
- APPLICABLE STD** : SAEJ30-R6; IS 15722

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m
	Inch	mm		bar	psi	bar	psi	Inch	mm	
EHCN335-06	1/4	6	12.5	5	75	15	225	2.6	65	0.130
EHCN335-08	5/16	8	14.5	5	75	15	225	3.0	76	0.150
EHCN335-10	3/8	10	16	5	75	15	225	3.5	90	0.180
EHCN335-12	1/2	12.5	20	5	75	15	225	4.0	101	0.260
EHCN335-16	5/8	16	23.8	5	75	15	225	4.9	125	0.320
EHCN335-19	3/4	19	28	5	75	15	225	6.0	152	0.410
EHCN335-25	1	25	35	5	75	15	225	7.0	178	0.545