


CAR WASH HOSE TEXTILE BRAIDED

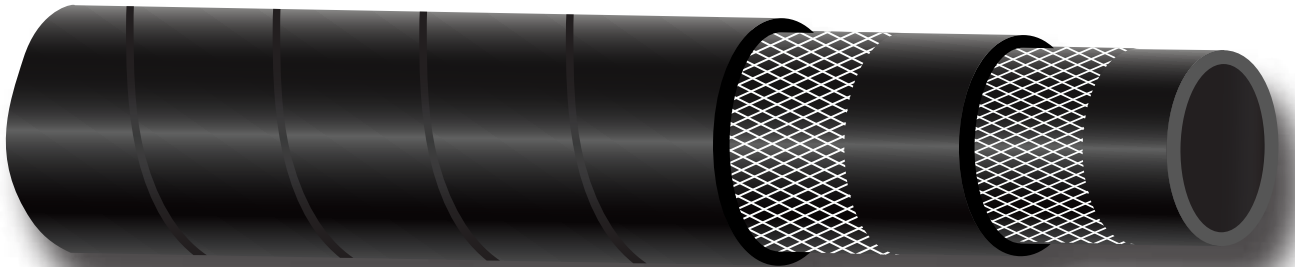

TUBE	: Modified synthetic rubber blend
REINFORCEMENT	: Double braid high tenacity synthetic yarn
COVER	: Synthetic rubber with excellent ageing, abrasion & weather resistance
TEMP RANGE	: -25° C +80° C (-13° F +176° F)
APPLICATIONS	: Suitable for use in automobile service station for pressurised water application
PROPERTIES	: Weather Resistance Abrasion Resistance Flexible
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer tube - Black Finish - Wrapped
APPLICABLE STD	: Elastohose Proprietary Product

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm		
EHCW133-10	3/8	10	19	28	400	112	1600	3.9	100	0.330	100/50
EHCW133-12	1/2	12.5	23	28	400	112	1600	4.9	125	0.470	100/50