


CAR WASH HOSE WIRE BRAIDED

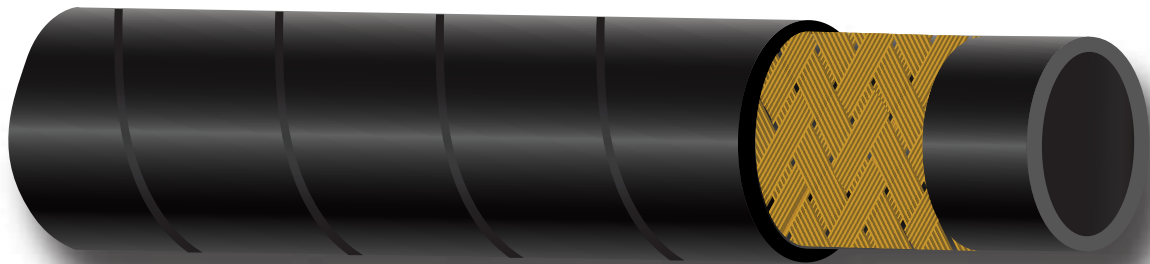

TUBE	:	Modified natural & synthetic blend of rubber compound
REINFORCEMENT	:	Single steel wire braid
COVER	:	Synthetic rubber with excellent ageing, abrasion & weather resistance
TEMP RANGE	:	-30° C + 80° C (-22° F +176° F)
APPLICATIONS	:	Suitable for use in automobile service station for pressurized water application
PROPERTIES	:	Uniform thickness Highly flexible High abrasion
STANDARD COLOUR AND FINISH	:	Inner tube - black Outer tube - black Finish - Wrapped
APPLICABLE STD	:	Elastohose Proprietary Product

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHCW134-10	3/8	10	19	75	1080	300	4320	3.5	90	0.310	100/50
EHCW134-12	1/2	12.5	22	75	1080	300	4320	4.5	115	0.400	100/50