


COTTON BRAIDED FUEL HOSE

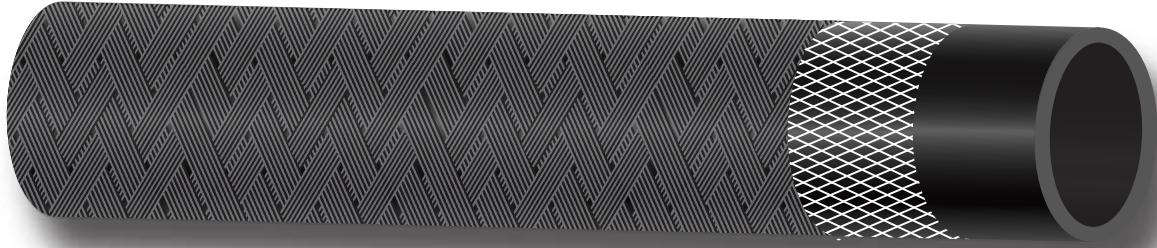

TUBE	: Oil-resistant synthetic rubber (NBR)
REINFORCEMENT	: Single braid high tensile yarn
COVER	: Dense braid black textile fibre
TEMP RANGE	: -40° C +100° C Approx (-40° F +212° F Approx)
APPLICATIONS	: For low pressure hydraulic lines applied in various applications like earthmoving and other adjacent industries
PROPERTIES	: Oil resistance Ageing Resistance Flexible
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer Cover - Black Textile braid Outer cover / Finish - Black cotton textile braid
APPLICABLE STD	: DIN 73379 TYPE B

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm		mm	bar	psi	bar	psi	Inch		
EHCB143-06	1/4	6	11.7	10	150	30	450	2.0	51	0.115	100+
EHCB143-08	5/16	8	13.3	10	150	30	450	2.5	64	0.135	100+
EHCB143-10	3/8	10	15	10	150	30	450	3.0	76	0.165	100+
EHCB143-12	1/2	12.5	18.8	10	150	30	450	3.0	76	0.215	100+
EHCB143-16	5/8	16	22.1	10	150	30	450	4.0	101	0.305	100+
EHCB143-19	3/4	19	25.6	10	150	30	450	5.0	127	0.415	100+
EHCB143-25	1	25	31.5	10	150	30	450	6.0	152	0.485	100