


## FUEL DISPENSING HOSE TYPE - III

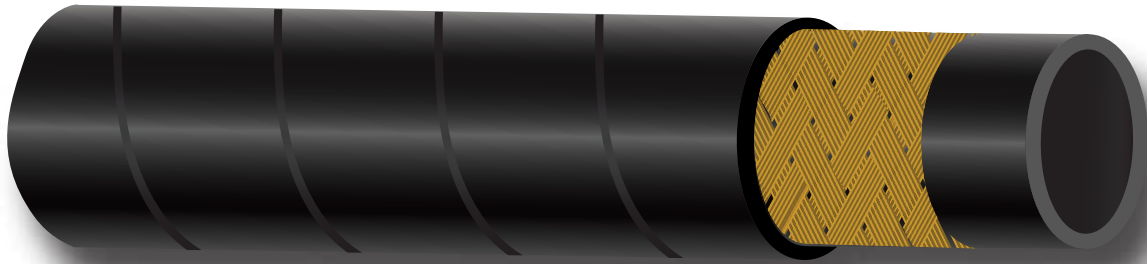

|                            |  |
|----------------------------|--|
| TUBE                       | : Specially compounded nitrile rubber resistant to gasoline                |
| REINFORCEMENT              | : One braid of high tensile brass coated steel wire                        |
| COVER                      | : Synthetic rubber resistant to oil, weather, abrasion and ozone resistant |
| TEMP RANGE                 | : -30° C +55° C (-22° F +131° F)   |
| APPLICATIONS               | : Suitable for use in petroleum based fuel dispensing application          |
| PROPERTIES                 | : Uniform thickness<br>Flexible  |
| STANDARD COLOUR AND FINISH | : Inner tube - Black<br>Outer cover - Black<br>Finish - Wrapped            |
| APPLICABLE STD             | : EN1360 TYPE III  |

| PART NO.   | INTERNAL DIAMETER |    | OUTER DIAMETER | WORKING PRESSURE |     | BURSTING PRESSURE |      | BENDING RADIUS |     | WEIGHT |
|------------|-------------------|----|----------------|------------------|-----|-------------------|------|----------------|-----|--------|
|            | Inch              | mm | mm             | bar              | psi | bar               | psi  | Inch           | mm  | Kg/m   |
| EHFD334-19 | 3/4               | 19 | 29             | 17               | 250 | 70                | 1000 | 5.9            | 150 | 0.604  |
| EHFD334-25 | 1                 | 25 | 35             | 17               | 250 | 70                | 1000 | 8.3            | 210 | 0.795  |