


## FUEL - OIL HOSE

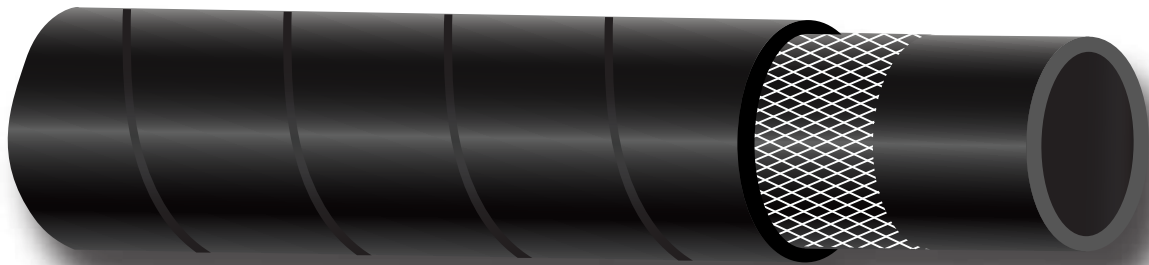

<b>TUBE</b>	: Oil Resistant Synthetic Rubber
<b>REINFORCEMENT</b>	: High Tenacity Synthetic Textile single braid
<b>COVER</b>	: Synthetic rubber resistant to oil , abrasion and ozone
<b>TEMP RANGE</b>	: -40°C + 100°C (-40°F +212°F)
<b>APPLICATIONS</b>	: Design to be used for transfer of fuel in engine compartments
<b>PROPERTIES</b>	: Uniform Thickness High Pressure Flexible Oil resistance
<b>STANDARD COLOUR AND FINISH</b>	: Inner Tube - Black Outer cover - Black Finish - Smooth/Wrapped
<b>APPLICABLE STD</b>	: SAE J 30 R2 TYPE 3

PART NO.	INNER DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm		mm	bar	psi	bar	psi	Inch		
EHFU112-05	3/16	4.8	11.1	35	510	140	2030	2.0	50	0.150	50 / 100
EHFU112-06	1/4	6	12.4	30	435	115	1670	2.6	65	0.170	50 / 100
EHFU112-08	5/16	8	14.3	30	435	115	1670	3.0	75	0.190	50 / 100
EHFU112-10	3/8	10	16	30	435	115	1670	3.3	85	0.260	50 / 100
EHFU112-12	1/2	12.5	19.8	30	435	115	1670	3.9	100	0.400	50 / 100
EHFU112-16	5/8	16	23	25	365	85	1235	4.9	125	0.450	50 / 100
EHFU112-19	3/4	19	26.5	25	365	85	1235	5.9	150	0.500	50 / 100
EHFU112-25	1	25	35	20	300	60	900	7.9	200	0.560	50 / 100