


LPG HOSE TYPE - I

TEXTILE BRAIDED

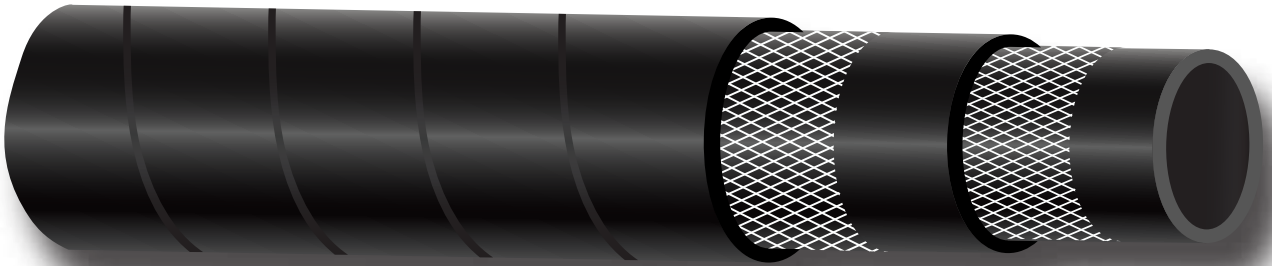

TUBE	: Black colour, Synthetic rubber resistant to n-pentane
REINFORCEMENT	: two braids of high tensile synthetic yarn with antistatic copper flex wire
COVER	: Perforated black colour synthetic rubber resistant to Oil / flame with good ageing properties
TEMP RANGE	: -40° C +65° C (-40° F +149° F)
APPLICATIONS	: Transfer of LPG in liquid/vapour form which is unvented between operations including automotive
PROPERTIES	: Oil resistant Flame resistant Weather resistant Uniform Thickness
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer cover - Black Finish - Wrapped
APPLICABLE STD	: EN1762 TYPE D/IS 9573 TYPE I

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	
EHLP336-06	1/4	6	12.7	25	365	100	1450	2.8	70	0.160
EHLP336-08	5/16	8	14.9	25	365	100	1450	3.7	95	0.200
EHLP336-10	3/8	10	17.3	25	365	100	1450	4.7	120	0.250
EHLP336-12	1/2	12.5	22.7	25	365	100	1450	5.9	150	0.450
EHLP336-16	5/8	16	25.9	25	365	100	1450	7.3	185	0.525
EHLP336-19	3/4	19	28.7	25	365	100	1450	8.9	225	0.585
EHLP336-25	1	25	38	25	365	100	1450	11.8	300	1.030