


LPG HOSE TYPE - II

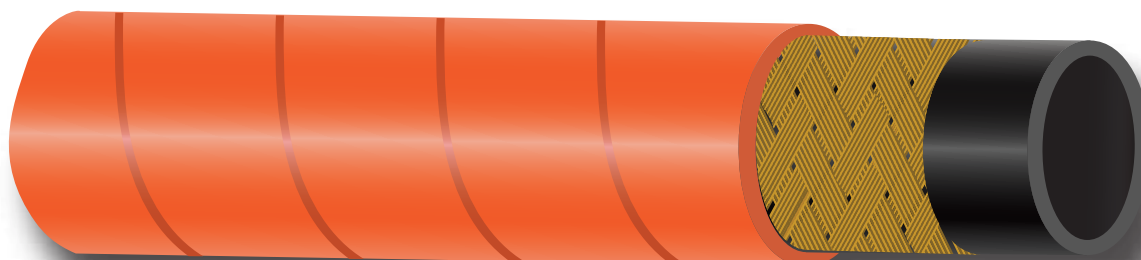

TUBE	: Black colour, Synthetic rubber resistant to n-pentane
REINFORCEMENT	: Single wire braid
COVER	: Perforated orange, Synthetic rubber excellent resistant to fire & ozone
TEMP RANGE	: -40° C to +70° C (-40° F +158° F)
APPLICATIONS	: Designed for domestic, LPG cylinders/ commercial installation
PROPERTIES	: Uniform Thickness Ozone and fire resistant Flexible
STANDARD COLOUR AND FINISH	: Inner Tube - Black Outer Cover - Orange Finish - Wrapped
APPLICABLE STD	: IS 9573:2012 - Type II

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	Kg/m
EHLP337-08	5/16	8	15	10	145	40	580	3.7	95	0.230
EHLP337-10	3/8	10	17	10	145	40	580	4.7	120	0.280
EHLP337-12	1/2	12.5	22	10	145	40	580	6.0	152	0.450