


LOADER HOSE

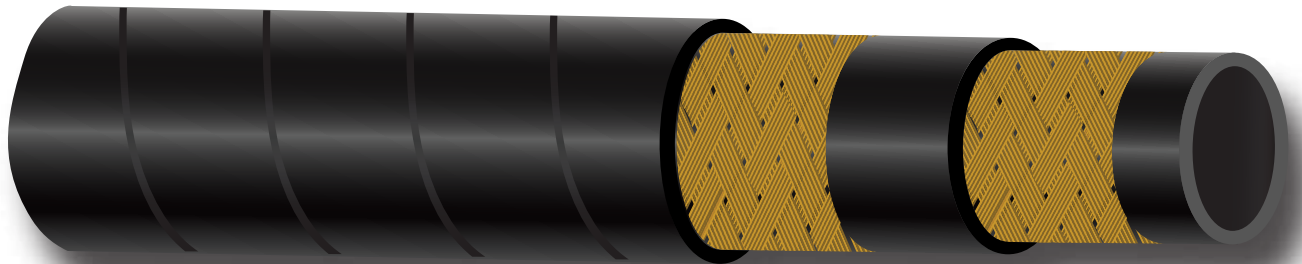

TUBE	: Oil - resistant synthetic rubber
REINFORCEMENT	: Two braid of high-tensile steel wire
COVER	: Synthetic rubber oil, water, weather, ozone & abrasion resistant
TEMP RANGE	: - 40° C +100° C (-40° F +212° F)
APPLICATIONS	: Used for conveying abrasive materials like powder, metal chips, rounded metal wastes, solid or liquid stuff
PROPERTIES	: Uniform thickness Flexible
STANDARD COLOUR AND FINISH	: Inner Tube - Black Outer Cover - Black Finish - Wrapped
APPLICABLE STD	: Elastohose Proprietary Product

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT
	Inch	mm		mm	bar	psi	bar	psi	Inch	
EHLO565-12	1/2	12.5	22.5	345	5000	1380	20000	7.1	180	0.650
EHLO565-19	3/4	19	29.5	260	3750	1040	15000	9.4	240	0.940
EHLO565-25	1	25	38	220	3150	880	12600	11.8	300	1.360