


## MINING HOSE

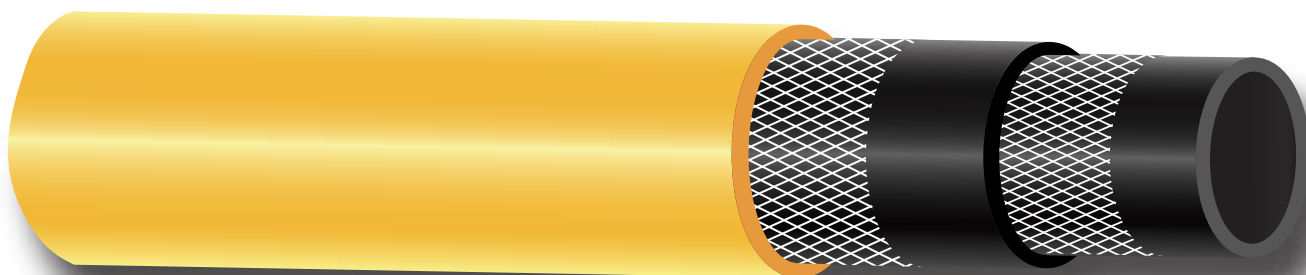

TUBE	: Black, Synthetic rubber (SBR/NR)
REINFORCEMENT	: Double braid of high-tenacity synthetic yarn
COVER	: Yellow/Blue, Ozone and weather Resistant Synthetic Rubber (SBR/NR)
TEMP RANGE	: -25° C +80° C (-13° F +176° F)
APPLICATIONS	: Construction and Mining Industry
PROPERTIES	: Uniform Thickness Weather resistance Ozone resistance Flexible
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer cover - Yellow/Blue Finish - Smooth or wrapped
APPLICABLE STD	: DIN20018

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHHM147-06	1/4	6	15	20	300	80	1200	2.4	60	0.260	100/50
EHHM147-08	5/16	8	17	20	300	80	1200	3.1	80	0.310	100/50
EHHM147-10	3/8	10	19	20	300	80	1200	3.9	100	0.360	100/50
EHHM147-11	1/2	12.5	23.5	20	300	80	1200	4.3	110	0.500	100/50
EHHM147-12	5/8	16	26.5	20	300	80	1200	5.5	140	0.570	100/50
EHHM147-14	3/4	19	30	20	300	80	1200	6.3	160	0.690	100/50
EHHM147-16	1	25	37.5	20	300	80	1200	8.3	210	0.950	100/50