


MULTIPURPOSE / GENERAL PURPOSE HOSE - NBR

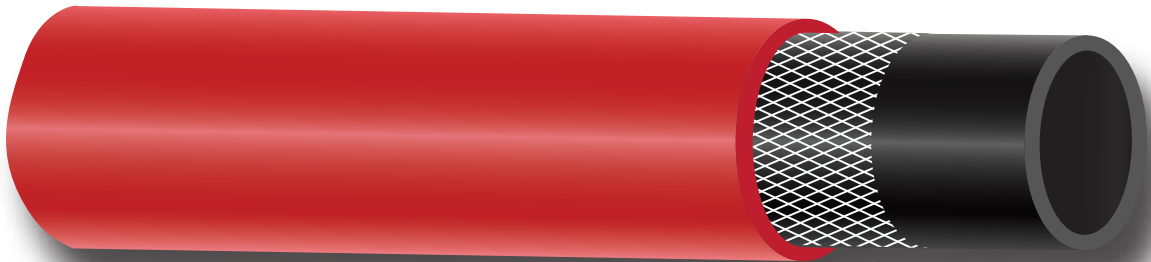

- TUBE** : NBR - Oil resistant synthetic rubber
- REINFORCEMENT** : One or multiple layers of Textile reinforced subjected to ID (1.1/4", 1.1/2" and 2" double braid)
- COVER** : NBR/EPDM -rubber resistant to Ozone and Weather
- TEMP RANGE** : -40° C +100° C (-40° F +212° F)
- APPLICATIONS** : For Oil / Fuel / Water / Air / Anti-freeze / Grease
- PROPERTIES** : Oil-fuel Resistance
Excellent Weather Resistance
Uniform Thickness
Low temperature flexibility
- STANDARD COLOUR AND FINISH** : Inner tube - Black
Outer cover - Red/Black
Finish - Smooth/Wrapped - Upto 1"
Wrapped - From 1.1/4" to 2"
- APPLICABLE STD** : Elastohose Proprietary Product

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURST PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtrs
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHMP118-06	1/4	6	13	20	300	60	900	1.8	45	0.160	100/50
EHMP118-08	5/16	8	15	20	300	60	900	2.7	69	0.200	100/50
EHMP118-10	3/8	10	17	20	300	60	900	3.3	85	0.240	100/50
EHMP118-12	1/2	12.5	21	20	300	60	900	4.3	109	0.320	100/50
EHMP118-16	5/8	16	24	20	300	60	900	5.7	145	0.410	100/50
EHMP118-19	3/4	19	27	20	300	60	900	6.5	165	0.500	100/50
EHMP118-25	1	25	35	20	300	60	900	8.5	215	0.700	100/50
EHMP118-32	1.1/4	32	43.5	20	300	60	900	10.0	255	1.200	60/40
EHMP118-38	1.1/2	38	50	20	300	60	900	12.0	305	1.450	60/40
EHMP118-51	2	51	64	20	300	60	900	16.7	425	2.000	40

Note : Taco shell packing available in 25, 50 and 100 ft up to 1" with (1/4 NPT) and without fittings