


## OXYGEN HOSE

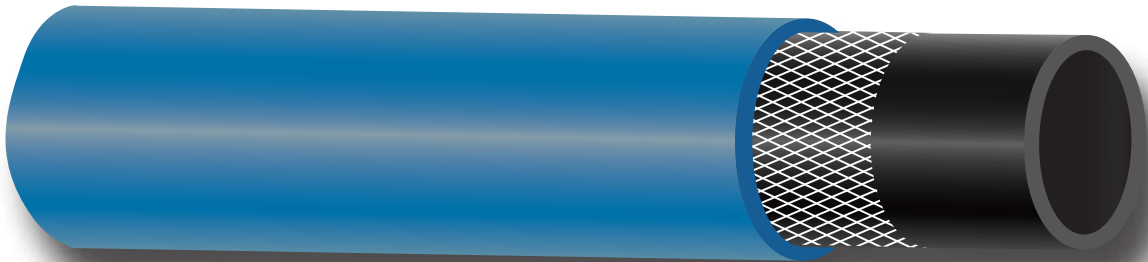

<b>TUBE</b>	: Natural and Synthetic rubber blend
<b>REINFORCEMENT</b>	: High Tenacity Synthetic Textile braid
<b>COVER</b>	: Blue abrasion & ozone resistant, SBR
<b>TEMP RANGE</b>	: -25°C + 80°C (-13° F +176° F)
<b>APPLICATIONS</b>	: Oxygen gas in welding/cutting
<b>PROPERTIES</b>	: High Abrasion Resistance Uniform Thickness flexible Heat Resistance
<b>STANDARD COLOUR AND FINISH</b>	: Inner tube - Black Outer tube - Blue Finish - Smooth/Wrapped
<b>APPLICABLE STD</b>	: IS 447 , ISO 3821

PART NO.	INNER DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtrs
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm		
EHOX114-06	1/4	6	13	20	300	60	900	1.9	48	0.160	50 / 100
EHOX114-08	5/16	8	15	20	300	60	900	2.5	64	0.220	50 / 100
EHOX114-10	3/8	10	17	20	300	60	900	3.9	100	0.250	50 / 100