


## PNEUMATIC TOOL HOSE

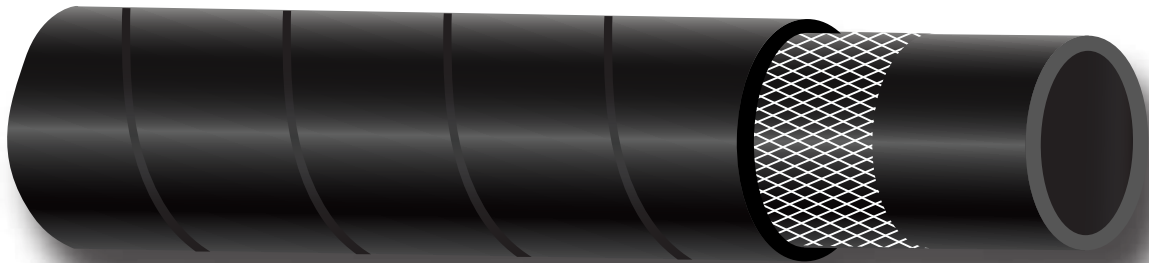

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>TUBE</b>                       | : Specially Compounded Synthetic Rubber, Black                                                                   |
| <b>REINFORCEMENT</b>              | : One or multiple layers of Textile reinforced subjected to ID (1", 1.1/4", 1.1/2" and 2" double braid)          |
| <b>COVER</b>                      | : Specially designed natural rubber compound resistant to weather, abrasion and ageing                           |
| <b>TEMP RANGE</b>                 | : -30° C +82° C approx. (-22° F +180° F)                                                                         |
| <b>APPLICATIONS</b>               | : For heavy duty applications in industries & pneumatic tools that use compressed air applications               |
| <b>PROPERTIES</b>                 | : Weather Resistance<br>Heavy duty<br>Abrasion resistance<br>Flexible                                            |
| <b>STANDARD COLOUR AND FINISH</b> | : Inner Tube - Black<br>Outer Cover - Black<br>Finish - Smooth/ Wrapped - Upto 1"<br>Wrapped - from 1.1/4" to 2" |
| <b>APPLICABLE STD</b>             | : Exceeds IS 446 - type II                                                                                       |

| PART NO.   | INTERNAL DIAMETER |      | OUTER DIAMETER | WORKING PRESSURE |     | BURSTING PRESSURE |     | BENDING RADIUS |     | WEIGHT | STD. LENGTH |
|------------|-------------------|------|----------------|------------------|-----|-------------------|-----|----------------|-----|--------|-------------|
|            | Inch              | mm   |                | bar              | psi | bar               | psi | Inch           | mm  |        |             |
| EHPN124-06 | 1/4               | 6    | 13             | 14               | 200 | 56                | 800 | 2.6            | 65  | 0.190  | 100         |
| EHPN124-08 | 5/16              | 8    | 15             | 14               | 200 | 56                | 800 | 3.0            | 75  | 0.250  | 100         |
| EHPN124-10 | 3/8               | 10   | 17             | 14               | 200 | 56                | 800 | 3.9            | 100 | 0.280  | 100         |
| EHPN124-12 | 1/2               | 12.5 | 20.5           | 14               | 200 | 56                | 800 | 4.7            | 120 | 0.360  | 100         |
| EHPN124-19 | 3/4               | 19   | 27.5           | 14               | 200 | 56                | 800 | 5.9            | 150 | 0.580  | 100         |
| EHPN124-25 | 1                 | 25   | 37             | 14               | 200 | 56                | 800 | 7.9            | 200 | 0.950  | 50          |
| EHPN124-32 | 1.1/4             | 32   | 43             | 14               | 200 | 56                | 800 | 9.8            | 250 | 1.200  | 50          |
| EHPN124-38 | 1.1/2             | 38   | 50             | 14               | 200 | 56                | 800 | 11.8           | 300 | 1.400  | 50          |
| EHPN124-51 | 2                 | 51   | 64             | 14               | 200 | 56                | 800 | 16.5           | 420 | 1.800  | 40          |