


## PRESSURE WASHER HOSE

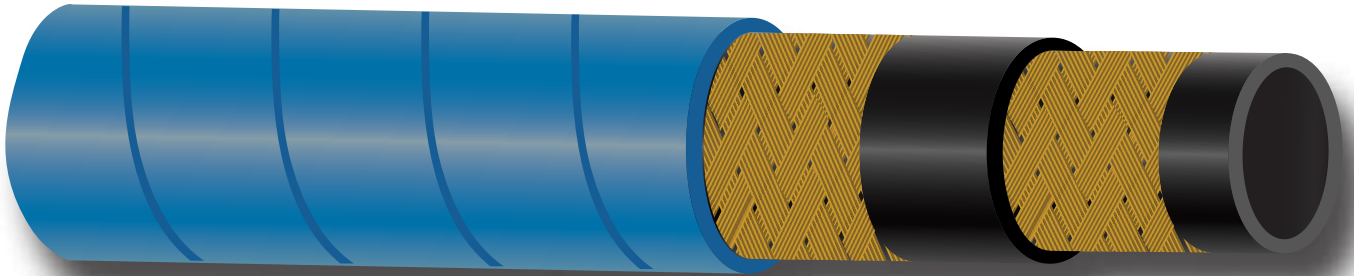

**415 BAR / 6000 PSI**

|                            |                                                                                            |
|----------------------------|--------------------------------------------------------------------------------------------|
| TUBE                       | : Black nitrile synthetic rubber                                                           |
| REINFORCEMENT              | : One high tensile steel wire braid                                                        |
| COVER                      | : Black abrasion, weather and oil resistant synthetic rubber                               |
| TEMP RANGE                 | : -30° C + 121° C (-22° F +250° F)                                                         |
| APPLICATIONS               | : For use with pressure washer machines and equipment with working pressure upto 6000 PSI  |
| PROPERTIES                 | : Highly flexible<br>High abrasion<br>Weather resistance                                   |
| STANDARD COLOUR AND FINISH | : Inner tube - black<br>Outer tube - blue/black/yellow/grey/red<br>Finish - Wrapped/Smooth |
| APPLICABLE STD             | : Elastohose Proprietary Product                                                           |

| PART NO.   | INTERNAL DIAMETER |      | OUTER DIAMETER | WORKING PRESSURE |      | BURSTING PRESSURE |       | BENDING RADIUS |    | WEIGHT |
|------------|-------------------|------|----------------|------------------|------|-------------------|-------|----------------|----|--------|
|            | Inch              | mm   | mm             | bar              | psi  | bar               | psi   | Inch           | mm | Kg/m   |
| EHPY162-06 | 1/4               | 6.4  | 13.6           | 415              | 6000 | 1660              | 24000 | 2.0            | 50 | 0.285  |
| EHPY162-08 | 5/16              | 8    | 15             | 415              | 6000 | 1660              | 24000 | 2.2            | 55 | 0.335  |
| EHPY162-10 | 3/8               | 10   | 17.6           | 415              | 6000 | 1660              | 24000 | 2.6            | 65 | 0.410  |
| EHPY162-12 | 1/2               | 12.5 | 20.7           | 415              | 6000 | 1660              | 24000 | 3.5            | 90 | 0.575  |