


PROPANE HOSE

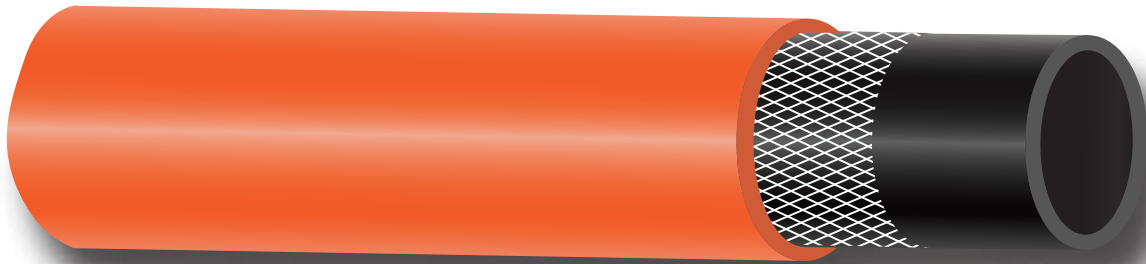

TUBE	: Oil Resistant Synthetic Rubber
REINFORCEMENT	: High Tenacity Synthetic Textile braid
COVER	: Synthetic Rubber resistant to oil ,ozone and abrasion
TEMP RANGE	: -25°C + 110°C (-13° F +230° F)
APPLICATIONS	: Design to be used for transfer of propane gas
PROPERTIES	: High Abrasion Resistance Uniform Thickness Flexible
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer cover - Orange Finish - Smooth and Wrapped
APPLICABLE STD	: ISO 3821, IS 447

PART NO.	INNER DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm		mm	bar	psi	bar	psi	Inch		
EHPR116-06	1/4	6	13	20	300	60	900	1.9	48	0.150	50 / 100
EHPR116-08	5/16	8	15	20	300	60	900	2.5	64	0.200	50 / 100
EHPR116-10	3/8	10	17	20	300	60	900	3.9	100	0.230	50 / 100