


ROCK DRILL HOSE

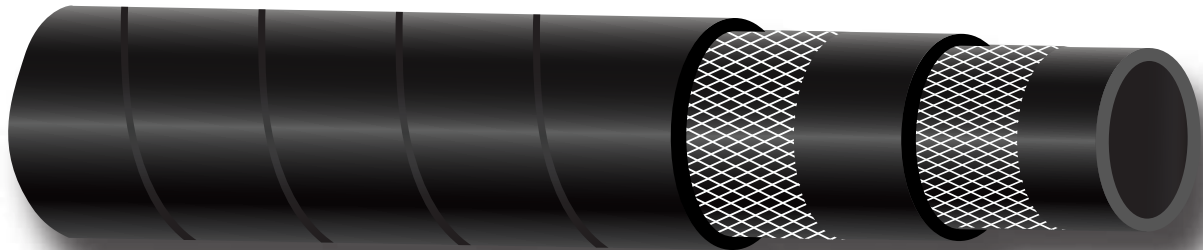

- TUBE** : Synthetic rubber based compound (resistant to long term air + oil mist effect)
- REINFORCEMENT** : Double braid of high-tenacity synthetic yarn
- COVER** : Modified synthetic rubber blend compound resistant to ageing & abrasion
- TEMP RANGE** : - 30° C + 80° C (-22° F +176° F)
- APPLICATIONS** : Heavy duty pneumatic application in industry, construction, open cast mines & quarries
- PROPERTIES** : Seamless
Uniform thickness
Flexible
High abrasion resistance
- STANDARD COLOUR AND FINISH** : Inner tube - black
Outer cover - black
Finish - Wrapped
- APPLICABLE STD** : Exceeds IS 446 - Type 3

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHRD126-12	1/2	12.5	23	21	310	84	1240	4.7	120	0.412	100/50
EHRD126-19	3/4	19	30	21	310	84	1240	5.9	150	0.603	100/50
EHRD126-25	1	25	38	21	310	84	1240	7.9	200	0.950	100/50
EHRD126-32	1.1/4	32	45	21	310	84	1240	9.8	250	1.257	60/40
EHRD126-38	1.1/2	38	52	21	310	84	1240	11.8	300	1.583	60/40
EHRD126-51	2	51	66	21	310	84	1240	16.5	420	2.204	40