


SAE 100 R5 C

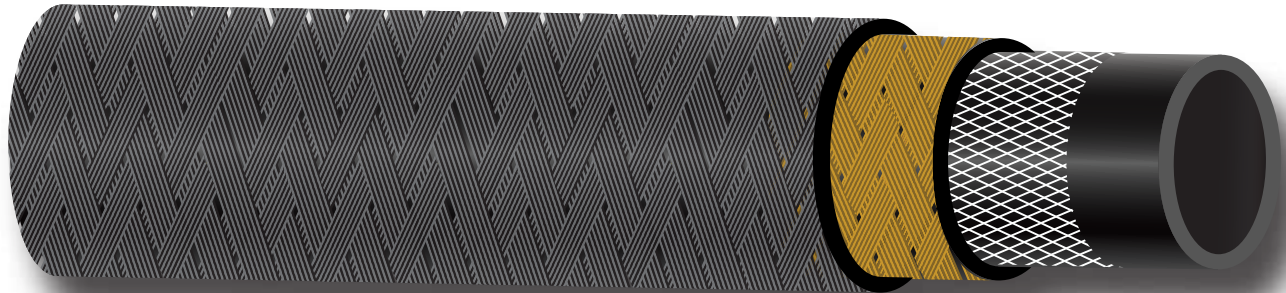

TUBE	: Black, Oil Resistant NBR Tube
REINFORCEMENT	: Single braided high tensile steel wire over one braid of yarn
COVER	: Cotton Yarn Braided Cover
TEMP RANGE	: -40° C +100° C Approx (-40° F +212° F Approx)
APPLICATIONS	: For medium pressure Oil Lubrication system in railway diesel engine
PROPERTIES	: Medium Temperature Uniform Thickness Flexible
STANDARD COLOUR AND FINISH	: Inner Tube - Black Outer Cover - Black Finish - Textile braid
APPLICABLE STD	: SAE 100 R5 C

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT
	Inch	mm		mm	bar	psi	bar	psi	Inch	
EH5R558-05	3/16	4.8	13.2	210	3045	840	12180	3.0	76	0.195
EH5R558-06	1/4	6.4	14.8	210	3045	840	12180	3.4	86	0.238
EH5R558-08	5/16	7.9	17.2	160	2320	640	9280	4.0	101	0.304
EH5R558-10	13/32	10.3	19.5	140	2030	560	8120	4.6	117	0.371
EH5R558-12	1/2	12.7	23.4	125	1815	500	7250	5.5	140	0.485
EH5R558-16	5/8	15.9	27.4	105	1525	420	6090	6.5	165	0.618
EH5R558-22	7/8	22.2	31.4	60	870	240	3480	7.4	188	0.670
EH5R558-29	1.1/8	28.9	38.1	45	655	180	2610	9.0	229	0.822
EH5R558-35	1.3/8	34.9	44.5	35	510	140	2030	10.5	267	1.007
EH5R558-46	1.13/16	46	58.9	25	365	100	1450	13.3	338	1.283