


SANDBLAST HOSE

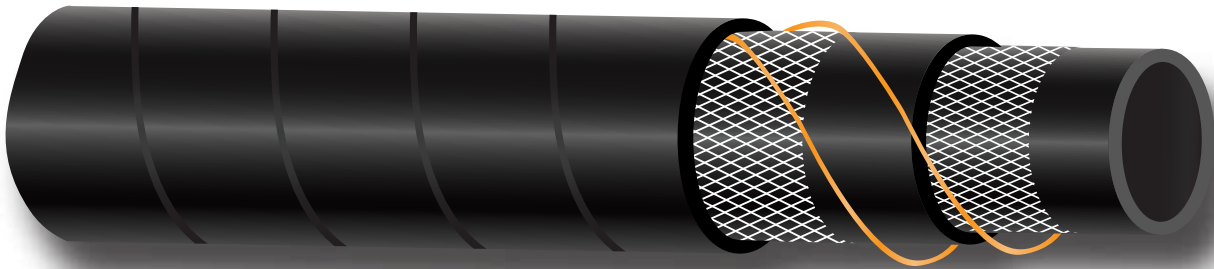

- TUBE** : Antistatic NR/PBR blend rubber with excellent abrasion resistance
- REINFORCEMENT** : Two braid of High tensile synthetic Yarn with anti-static copper flex wire
- COVER** : NR/ SBR cover - resistant to abrasion and weather
- TEMP RANGE** : -40°C + 80°C (-40°F to +176°F)
- APPLICATIONS** : Suitable for Conveying all commonly used material for blasting, such as steel shot, steel grit, garnet, copper slag, coal slag, Aluminium Oxide, Glass Breeds etc.
- PROPERTIES** : High Abrasion resistance (abrasion loss of the tube according to ISO 4649: 50+5mm³)
- STANDARD COLOUR AND FINISH** : Inner tube - Black
Outer Cover - Black
Finish - Wrapped
- APPLICABLE STANDARD** : IS 5894 , ISO 3861

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtrs
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHSA111-12a	1/2	12.5	27	12	175	36	525	5.9	150	0.550	40
EHSA111-12b	1/2	12.5	33	12	175	36	525	6.7	170	0.830	40
EHSA111-19a	3/4	19	33	12	175	36	525	6.9	175	0.720	40
EHSA111-19b	3/4	19	38	12	175	36	525	7.9	200	1.040	40
EHSA111-25a	1	25	40	12	175	36	525	9.1	230	0.900	40
EHSA111-25b	1	25	48	12	175	36	525	11.8	300	1.440	40
EHSA111-32a	1.1/4	32	48	12	175	36	525	10.0	255	1.160	40
EHSA111-32b	1.1/4	32	54	12	175	36	525	12.6	320	1.880	40
EHSA111-38a	1.1/2	38	54	12	175	36	525	11.8	300	1.460	40
EHSA111-38b	1.1/2	38	60	12	175	36	525	17.7	450	2.010	40
EHSA111-51a	2	51	68	12	175	36	525	25.6	650	2.130	40
EHSA111-51b	2	51	73	12	175	36	525	27.6	700	2.700	40