


STEAM HOSE SUPER SATURATED

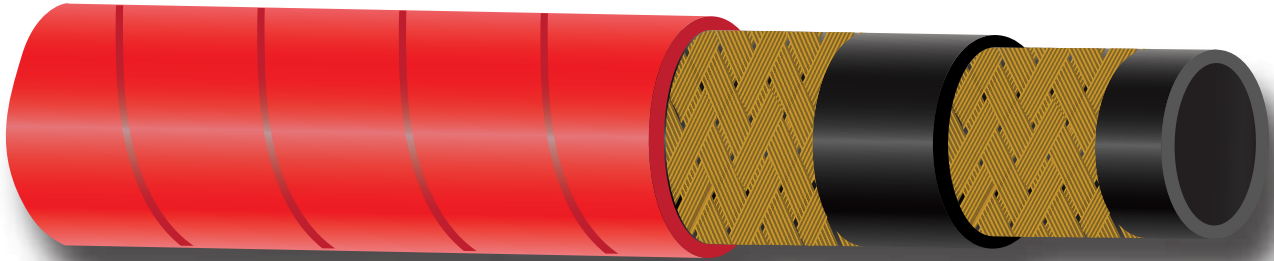

- TUBE** : Heat resistant EPDM rubber compound
- REINFORCEMENT** : Double braid of high-tensile steel wire
- COVER** : heat resistant EPDM rubber compound resistant to heat, ozone & ageing
- TEMP RANGE** : Service temperature upto + 210° C (+410° F)
- APPLICATIONS** : Used in refineries, shipyards, chemical plants, Steel mills, foundries and heavy industries for steam applications that can be resisted upto 210° C at a constant pressure of 250 PSI
- PROPERTIES** : High Temperature
Heat Resistance
Highly flexible
Uniform Thickness
- STANDARD COLOUR AND FINISH** : Inner tube - Black
Outer cover - Red / Black
Finish - Wrapped
- APPLICABLE STD** : IS 10655 TYPE III ,BS 5342 TYPE 2 , ISO 6134

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHST122-10	3/8	10	21	17	250	170	2500	4.9	125	0.450	60
EHST122-12	1/2	12.5	25	17	250	170	2500	7.1	180	0.500	60
EHST122-16	5/8	16	29	17	250	170	2500	7.9	200	0.650	60
EHST122-19	3/4	19	31	17	250	170	2500	9.4	240	0.750	60
EHST122-25	1	25	38	17	250	170	2500	11.8	300	0.975	60
EHST122-32	1.1/4	32	46	17	250	170	2500	15.7	400	1.190	40
EHST122-38	1.1/2	38	51	17	250	170	2500	19.7	500	1.340	40
EHST122-51	2	51	67	17	250	170	2500	25.6	650	2.130	40