


STEAM HOSE

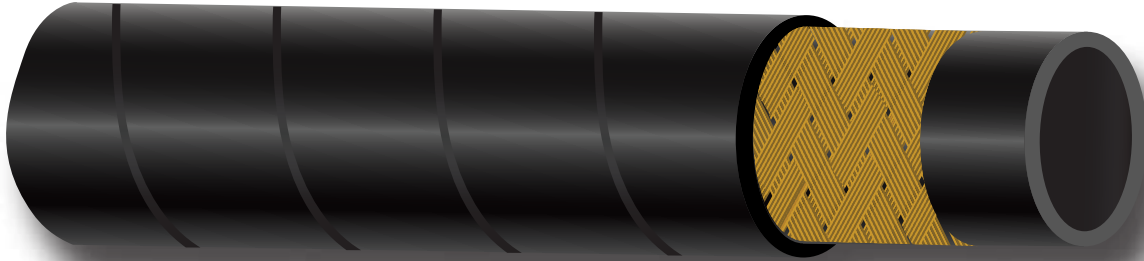

- TUBE** : Heat resistant EPDM rubber compound
- REINFORCEMENT** : One braid of high-tensile steel wire
- COVER** : Heat resistant EPDM rubber compound resistant to heat, ozone & ageing
- TEMP RANGE** : Service temperature upto + 185° C (+365° F)
- APPLICATIONS** : Used in refineries, shipyards, chemical plants, Steel mills, foundries and heavy industries for steam applications that can be resisted upto 185° C at a constant pressure of 150 PSI
- PROPERTIES** : High Temperature
Heat Resistance
Flexible
Uniform Thickness
- STANDARD COLOUR AND FINISH** : Inner Tube - Black
Outer Cover - Black / Red
Finish - Wrapped
- APPLICABLE STD** : IS 10655 TYPE II, BS 5342 TYPE 1

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHST121-10	3/8	10	19	10	150	100	1500	4.9	125	0.360	60
EHST121-12	1/2	12.5	23	10	150	100	1500	7.1	180	0.400	60
EHST121-16	5/8	16	27	10	150	100	1500	7.9	200	0.510	60
EHST121-19	3/4	19	29	10	150	100	1500	9.4	240	0.620	60
EHST121-25	1	25	36	10	150	100	1500	11.8	300	0.780	60
EHST121-32	1.1/4	32	43	10	150	100	1500	15.7	400	1.281	40