


SUPER JACK HOSE

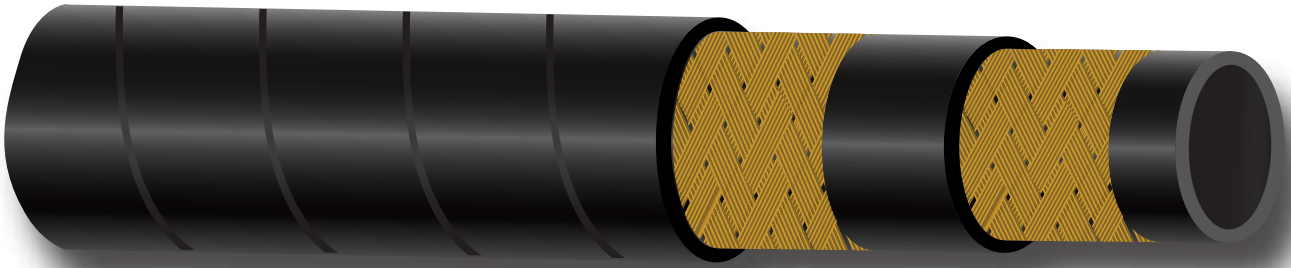

- TUBE** : Black, oil-resistant synthetic rubber (NBR)
- REINFORCEMENT** : Double braided high tensile steel wire
- COVER** : Wrap & Smooth Black, oil and abrasion-resistant synthetic rubber
- TEMP RANGE** : -40° C +100° C ; +120° C intermittent (-40° F +212° F; +248° F intermittent)
- APPLICATIONS** : For constant high pressure applications like Hydraulic Jacks
- PROPERTIES** : Uniform Thickness
High Pressure
Flexible
- STANDARD COLOUR AND FINISH** : Inner Tube - Black
Outer Cover - Black
Finish - Wrapped
- APPLICABLE STD** : Elastohose Proprietary Product

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	Kg/m
EHSJ563-06	1/4	6.4	14.8	700	10150	1400	20300	4.0	102	0.377
EHSJ563-10	3/8	9.5	18.8	700	10150	1400	20300	5.0	127	0.550
EHSJ563-13	1/2	13	21.8	700	10150	1400	20300	7.1	180	0.645