


## SUPER ROCK DRILL HOSE

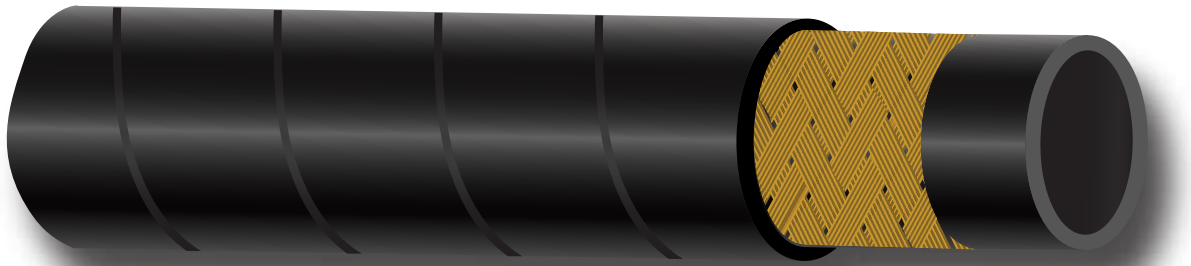

- TUBE** : Specially designed oil resistant synthetic rubber
- REINFORCEMENT** : One braid of high tensile steel wire
- COVER** : Nitrile rubber resistant to oil, weather and abrasion
- TEMP RANGE** : -30° C + 80° C (-22° F +176° F)
- APPLICATIONS** : Heavy duty pneumatic application in industry, construction, open cast mines & quarries
- PROPERTIES** : Oil Mist resistance  
Weather Resistance  
Abrasion Resistance
- STANDARD COLOUR AND FINISH** : Inner tube - black  
Outer cover - Black  
Finish - Wrapped
- APPLICABLE STD** : Exceeds IS 446 - Type III

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	Kg/m	Mtr
EHSD127-12	1/2	12.5	20.5	35	500	140	2000	7.1	180	0.385	50
EHSD127-19	3/4	19	27.5	35	500	140	2000	9.4	240	0.660	50
EHSD127-25	1	25	36	35	500	140	2000	11.8	300	0.920	50
EHSD127-32	1.1/4	32	45	35	500	140	2000	15.7	400	1.340	40
EHSD127-38	1.1/2	38	50.5	35	500	140	2000	19.7	500	1.480	40
EHSD127-51	2	51	63.5	35	500	140	2000	25.6	650	1.980	40