


SUPER SPRAY HOSE

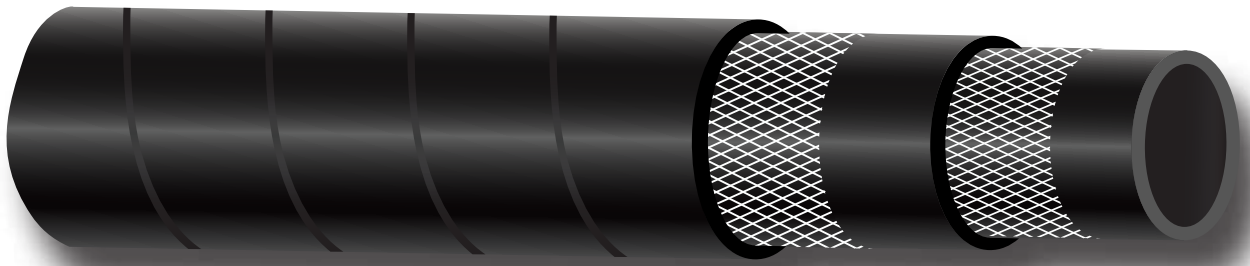

TUBE	: Modified Nitrile Rubber Compound, Black
REINFORCEMENT	: Double braided high tensile yarn
COVER	: Synthetic Rubber resistance to weather , ozone and abrasion
TEMP RANGE	: -30° C +82° C approx. (-22° F +180° F)
APPLICATIONS	: For very high pressure spray applications like pesticides and chemicals in agriculture and forestry
PROPERTIES	: High Pressure Weather resistance Flexible
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer cover - Black Finish - Wrapped
APPLICABLE STD	: IS 1677 Type 3A

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	Kg/m	Mtrs
EHSS128-08	5/16	8	18	55	800	165	2400	3.1	80	0.320	100
EHSS128-10	3/8	10	20	55	800	165	2400	4.0	102	0.370	100
EHSS128-12	1/2	12.5	23.5	55	800	165	2400	5.0	127	0.490	100