


TRACTOR TROLLEY HOSE

DOUBLE WIRE

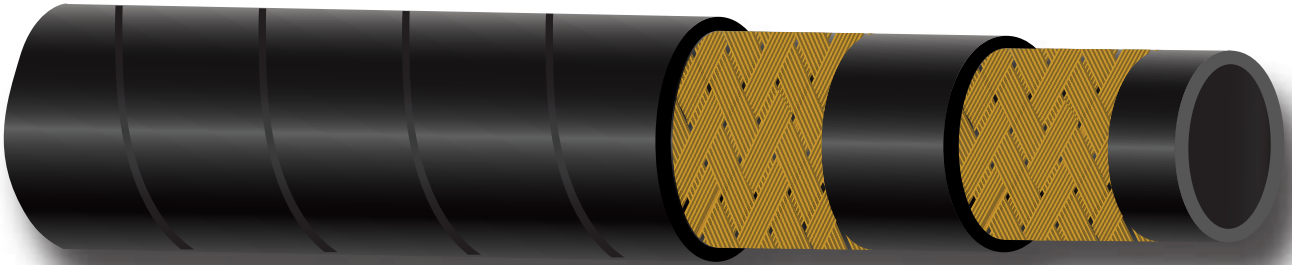

- TUBE : Oil - resistant synthetic rubber compound
- REINFORCEMENT : Two braid of high-tensile steel wire
- COVER : Synthetic rubber oil / water, weather, ageing and abrasion - resistant
- TEMP RANGE : -40° C +80° C (-40° F +176° F)
- APPLICATIONS : For high pressure hydraulic application in tractor trolley
- PROPERTIES : Uniform Thickness; Flexible
- STANDARD COLOUR AND FINISH : Inner Tube - Black; Outer Cover - Black; Finish - Wrapped
- APPLICABLE STD : Elastohose Proprietary Product

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	Kg/m
EHTR567-10	3/8	10	18.5	207	3000	1103	10000	4.9	125	0.395
EHTR567-12	1/2	12.5	21.7	172	2500	966	8000	7.1	180	0.505