


TWIN WELDING HOSE - GRADE R

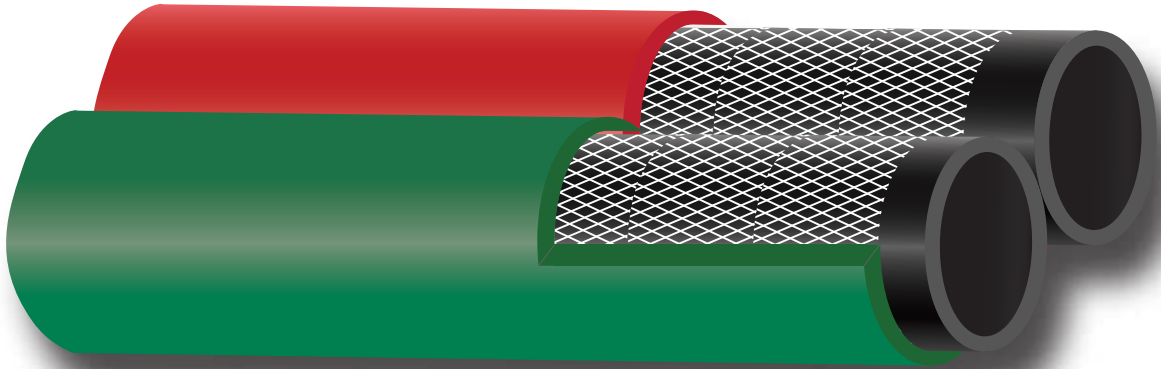

TUBE	:	Natural and Synthetic rubber blend
REINFORCEMENT	:	High Tenacity Synthetic Textile braid
COVER	:	Natural and Synthetic rubber blend resistant to Ozone , abrasion and heat
TEMP RANGE	:	-25°C + 80°C (-13°F +176°F)
APPLICATIONS	:	For Welding / Cutting Purpose
PROPERTIES	:	Ozone resistance Heat Resistance Flexible Uniform Thickness
STANDARD COLOUR AND FINISH	:	Inner tube - Black Outer cover - Red-Green Finish - Smooth
APPLICABLE STD	:	MEETS RMA / CGA : IP - 7

Part no.	INNER DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm		
EHTW149-06	1/4	6	13	20	300	60	900	3.1	80	0.340	50 / 100
EHTW149-08	5/16	8	15	20	300	60	900	3.5	90	0.460	50 / 100
EHTW149-10	3/8	10	17	20	300	60	900	3.9	100	0.520	50 / 100

Note : Available in shrink box packing in 25 , 50 and 100 ft length with (B Type) and without brass fittings