


TWIN WELDING HOSE - GRADE T

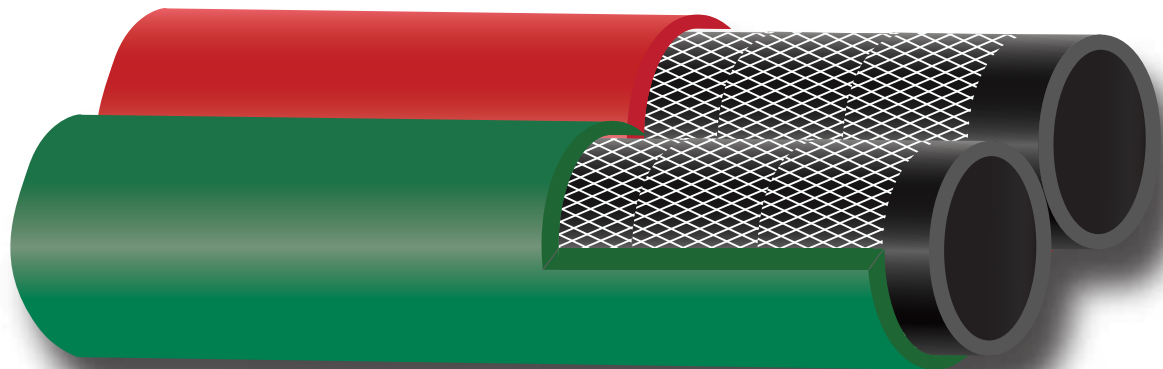

TUBE	: Neoprene blend
REINFORCEMENT	: High Tenacity Synthetic Textile braid
COVER	: Natural and Synthetic rubber blend resistant to Ozone , abrasion and heat
TEMP RANGE	: -25°C + 80°C (-13°F +176°F)
APPLICATIONS	: Fuel gases
PROPERTIES	: Ozone resistance Heat Resistance Flexible Uniform Thickness
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer cover - Red-Green; Red-Blue Finish - Smooth
APPLICABLE STD	: MEETS RMA / CGA : IP - 7

PART NO.	INNER DIAMETER		OUTER DIAMETER	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT	STD. LENGTH
	Inch	mm	mm	bar	psi	bar	psi	Inch	mm	Kg/m	Mtr
EHTW151-06	1/4	6	13	20	300	60	900	3.1	80	0.340	50 / 100
EHTW151-08	5/16	8	15	20	300	60	900	3.5	90	0.460	50 / 100
EHTW151-10	3/8	10	17	20	300	60	900	3.9	100	0.520	50 / 100

Note : Available in shrink box packing in 25 , 50 and 100 ft length with (B Type) and without brass fittings