


OIL HOSE 20 BAR

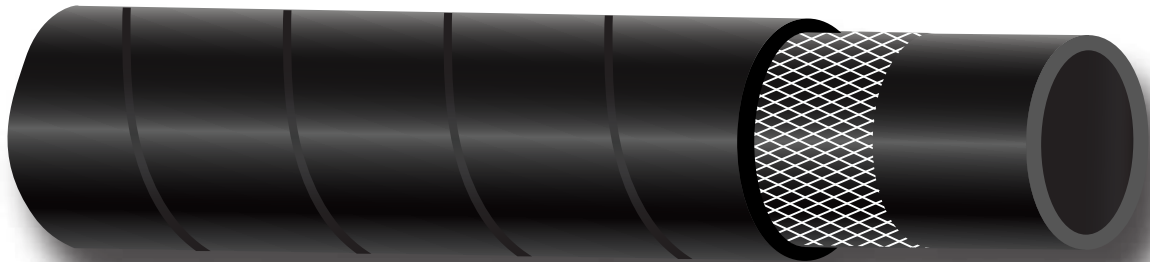

- TUBE** : Oil Resistant Synthetic Rubber
- REINFORCEMENT** : High Tenacity Synthetic Textile single braid
- COVER** : Synthetic rubber resistant to oil , abrasion and ozone
- TEMP RANGE** : -40°C + 100°C (-40°F +212°F)
- APPLICATIONS** : Design to be used for transfer of oil
- PROPERTIES** : Uniform Thickness
High Pressure
Flexible
Oil resistance
- STANDARD COLOUR AND FINISH** : Inner Tube - Black
Outer cover - Black
Finish - Smooth/Wrapped
- APPLICABLE STD** : Elastohose Proprietary Product

PART NO.	INNER DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHFV166-05	3/16	4.8	11.1	20	300	60	900	2.0	50	0.150	50 / 100
EHFV166-06	1/4	6	12.4	20	300	60	900	2.6	65	0.170	50 / 100
EHFV166-08	5/16	8	14.3	20	300	60	900	3.0	75	0.190	50 / 100
EHFV166-10	3/8	10	16	20	300	60	900	3.3	85	0.260	50 / 100
EHFV166-12	1/2	12.5	19.8	20	300	60	900	3.9	100	0.400	50 / 100
EHFV166-16	5/8	16	23	20	300	60	900	4.9	125	0.450	50 / 100
EHFV166-19	3/4	19	26.5	20	300	60	900	5.9	150	0.500	50 / 100
EHFV166-25	1	25	35	20	300	60	900	7.9	200	0.560	50 / 100