


AIR HOSE DOUBLE BRAID HEAVY DUTY

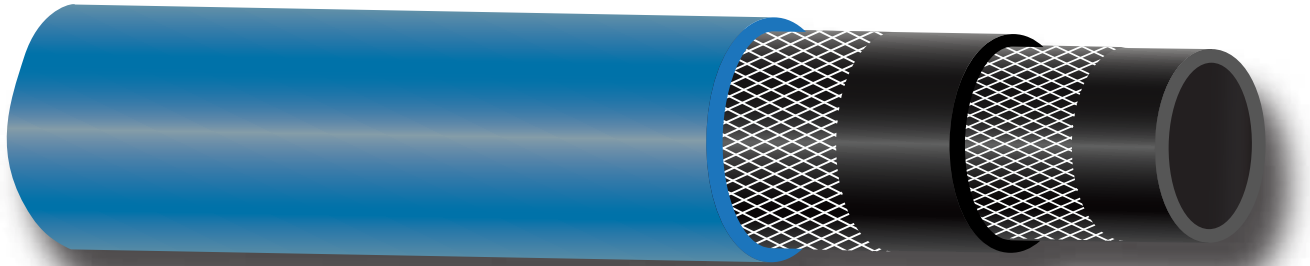

TUBE	: Natural-synthetic rubber Blend
REINFORCEMENT	: Double braided high tensile textile yarn
COVER	: Synthetic elastomer - abrasion and ozone resistant
TEMP RANGE	: -25° C +80° C (-13° F +176° F)
APPLICATIONS	: Compressed air and general industrial applications
PROPERTIES	: Flexible High abrasion Uniform thickness
STANDARD COLOUR AND FINISH	: Inner tube - Black Outer cover - Blue Finish - Smooth/Wrapped
APPLICABLE STD	: ISO 2398 ; IS 446

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtr
	Inch	mm		bar	psi	bar	psi	Inch	mm		
EHA1140-06	1/4	6	15	20	300	80	1200	2.4	60	0.260	100/50
EHA1140-08	5/16	8	17	20	300	80	1200	3.1	80	0.310	100/50
EHA1140-10	3/8	10	19	20	300	80	1200	3.9	100	0.360	100/50
EHA1140-12	1/2	12.5	23.5	20	300	80	1200	4.3	110	0.500	100/50
EHA1140-16	5/8	16	26.5	20	300	80	1200	5.5	140	0.570	100/50
EHA1140-19	3/4	19	30	20	300	80	1200	6.3	160	0.690	100/50
EHA1140-25	1	25	37.5	20	300	80	1200	8.3	210	0.950	100/50