


## WATER HOSE HEAVY DUTY

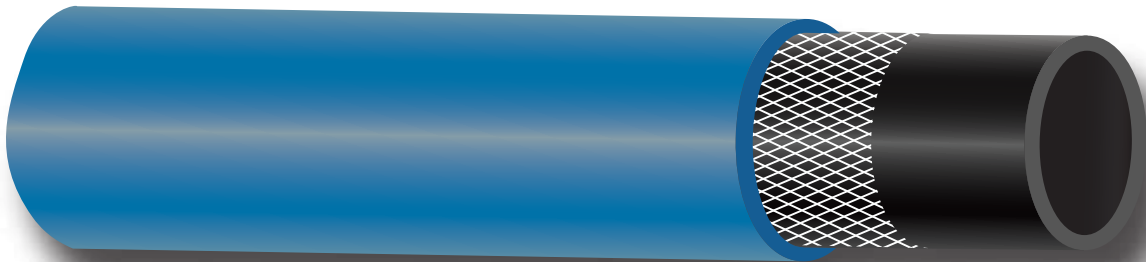

- TUBE** : Specially designed synthetic rubber compound
- REINFORCEMENT** : High tenacity synthetic textile braid
- COVER** : Specially designed natural rubber compound resistant to weather, abrasion and ageing
- TEMP RANGE** : -25° C +75° C (-13° F +167° F)
- APPLICATIONS** : For all water delivery applications
- PROPERTIES** : Uniform thickness  
Seamless  
Flexible
- STANDARD COLOUR AND FINISH** : Inner tube - Black  
Outer cover - Blue / Black  
Finish - Smooth/Wrapped - upto 1"  
Wrapped - From 1.1/4" to 2"
- APPLICABLE STD** : IS 444

PART NO.	INTERNAL DIAMETER		OUTER DIAMETER mm	WORKING PRESSURE		BURSTING PRESSURE		BENDING RADIUS		WEIGHT Kg/m	STD. LENGTH Mtrs
	Inch	mm		Bar	psi	Bar	psi	Inch	mm		
EHWH139-06	1/4	6	13	15	215	45	650	1.6	40	0.165	100
EHWH139-08	5/16	8	15	15	215	45	650	2.5	64	0.215	100
EHWH139-10	3/8	10	17	15	215	45	650	3.1	80	0.250	100
EHWH139-12	1/2	12.5	21	15	215	45	650	4.1	104	0.340	100
EHWH139-16	5/8	16	25	15	215	45	650	5.5	140	0.430	100
EHWH139-19	3/4	19	27	15	215	45	650	6.3	160	0.520	100
EHWH139-25	1	25	35	15	215	45	650	8.3	210	0.740	100
EHWH139-32	1.1/4	32	43.5	15	215	45	650	9.8	250	1.200	40
EHWH139-38	1.1/2	38	50	15	215	45	650	11.8	300	1.450	40
EHWH139-51	2	51	64	15	215	45	650	16.5	420	2.000	40

**NOTE** : Taco shell packing available in 25, 50 and 100 feet with 3/4" brass fittings and without fittings